




너트 재질 : BC6 (청동주물)



ASM

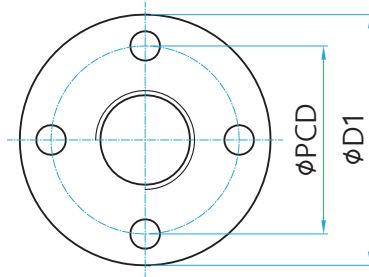

TSM

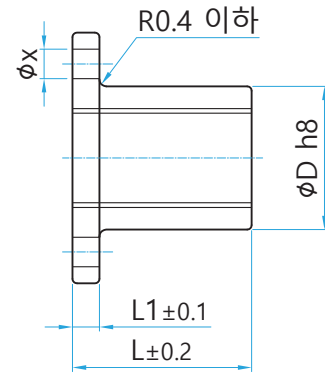


(unit : mm)

축경 (ØD)	형번	리드	ØD	ØD1	L	L1	W	PCD	Øx	Fo (kgf)	중량 (g)
5	ASM5008	0.8	10	24	14	3	10	17	3.3	108	11
	TSM5008						-				
	ASM5020	2	10	24	14	3	10	17	3.3	106	11
	TSM5020						-				
	ASM5100	10	10	24	14	3	10	17	3.3	106	11
	TSM5100						-				
8	ASM8020	2	15	30	20	4	15	22	3.3	235	38
	TSM8020						-				
	ASM8100	10	15	30	20	4	15	22	3.3	253	38
	TSM8100						-				

Fo : 동적허용추력 (kgf)

너트 재질 : BC6 (청동주물)

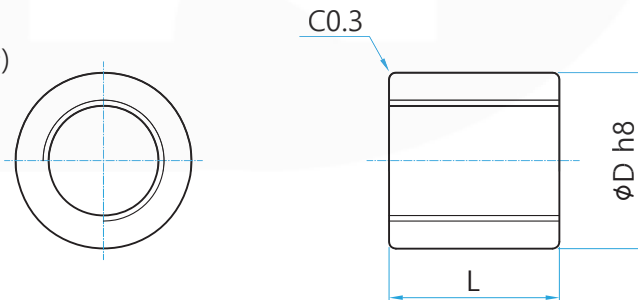

SSM

(unit : mm)

축경 (ØD)	형번	리드	ØD	L	Fo (kgf)	중량 (g)
5	SSM5008	0.8	10	12	93	6
	SSM5020	2	10	12	91	6
	SSM5100	10	10	12	91	6
8	SSM8020	2	15	20	235	20
	SSM8100	10	15	20	253	20

Fo : 동적허용추력 (kgf)