
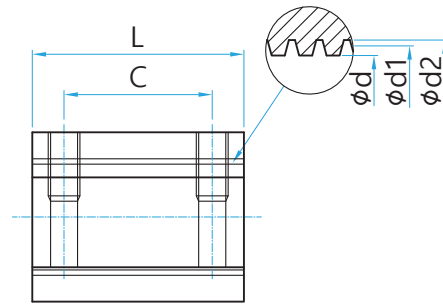


너트 재질 : BC6 (청동주물)

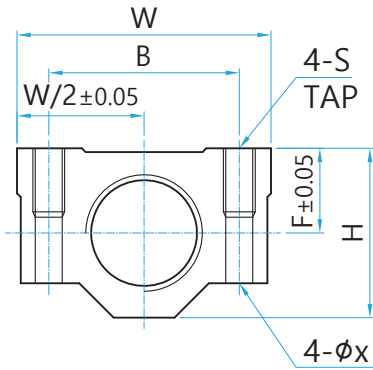

(unit : mm)

| 축경<br>( $\phi$ ) | 형번    |        | 리드 | W  | H  | F  | L  | B  | C  | S  | $\phi_x$ | 내경<br>$\phi_d$ | 유효경<br>$\phi_{d1}$ | 곡경<br>$\phi_{d2}$ | Fo<br>(kgf) | 중량<br>(kg) |
|------------------|-------|--------|----|----|----|----|----|----|----|----|----------|----------------|--------------------|-------------------|-------------|------------|
| 10               | BTM10 | R<br>L | 2  | 30 | 20 | 10 | 24 | 20 | 16 | M4 | 3.3      | 8.5            | 9                  | 10.5              | 260         | 0.1        |
| 12               | BTM12 | R<br>L | 2  | 38 | 22 | 11 | 30 | 26 | 20 | M5 | 4.3      | 10.5           | 11                 | 12.5              | 400         | 0.15       |
| 14               | BTM14 | R<br>L | 3  | 38 | 22 | 11 | 30 | 26 | 20 | M5 | 4.3      | 11.5           | 12.5               | 14.5              | 500         | 0.14       |
| 16               | BTM16 | R<br>L | 3  | 44 | 28 | 14 | 35 | 32 | 24 | M5 | 4.3      | 13.5           | 14.5               | 16.5              | 640         | 0.3        |
| 18               | BTM18 | R<br>L | 4  | 48 | 32 | 16 | 40 | 36 | 28 | M6 | 5.1      | 14.5           | 16                 | 18.5              | 890         | 0.4        |
| 20               | BTM20 | R<br>L | 4  | 48 | 32 | 16 | 40 | 36 | 28 | M6 | 5.1      | 16.5           | 18                 | 20.5              | 1000        | 0.4        |
| 22               | BTM22 | R<br>L | 5  | 62 | 38 | 20 | 50 | 46 | 34 | M8 | 6.8      | 18             | 19.5               | 22.5              | 1260        | 0.7        |
| 25               | BTM25 | R<br>L | 5  | 62 | 38 | 20 | 50 | 46 | 34 | M8 | 6.8      | 21             | 22.5               | 25.5              | 1440        | 0.6        |
| 28               | BTM28 | R<br>L | 5  | 68 | 47 | 25 | 56 | 52 | 40 | M8 | 6.8      | 24             | 25.5               | 28.5              | 1800        | 1          |
| 32               | BTM32 | R<br>L | 6  | 68 | 47 | 25 | 56 | 52 | 40 | M8 | 6.8      | 27             | 29                 | 32.5              | 2090        | 1          |

Fo : 동적허용추력 (kgf)