



TRS-V



(unit : mm)

형번	H	W	L	B	C	n-Sxℓ	L1	오일홀	T1	N	E	W2
TRS15VS	24	34	40.3	26	-	2-M4x5	22.9	M4x0.7	5.5	7	3.2	9.5
TRS15VN			56.9		26	4-M4x5	39.5					
TRS20VS	28	42	49.4	32	-	2-M5x5	27.8	M6x1	4.5	14	4.6	11
TRS20VN			68.3		32	4-M5x5	46.7					
TRS25VS	33	48	57.2	35	-	2-M6x6	35.2	M6x1	4.5	14	5.8	12.5
TRS25VN			81		35	4-M6x6	59					
TRS30VS	42	60	67.4	40	-	2-M8x8	40.4	M6x1	8	14	7	16
TRS30VN			96.3		40	4-M8x8	69.3					
TRS35VS	48	70	75.7	50	-	2-M8x8	45.7	M6x1	8	14	7.5	18
TRS35VN			109		50	4-M8x8	79					
TRS45VN	60	86	124.5	60	60	4-M10x15	90.5	PT 1/8	10.5	12.5	8.9	20.5

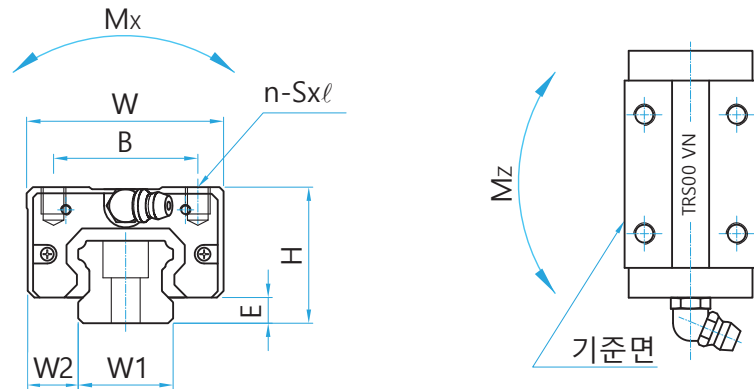

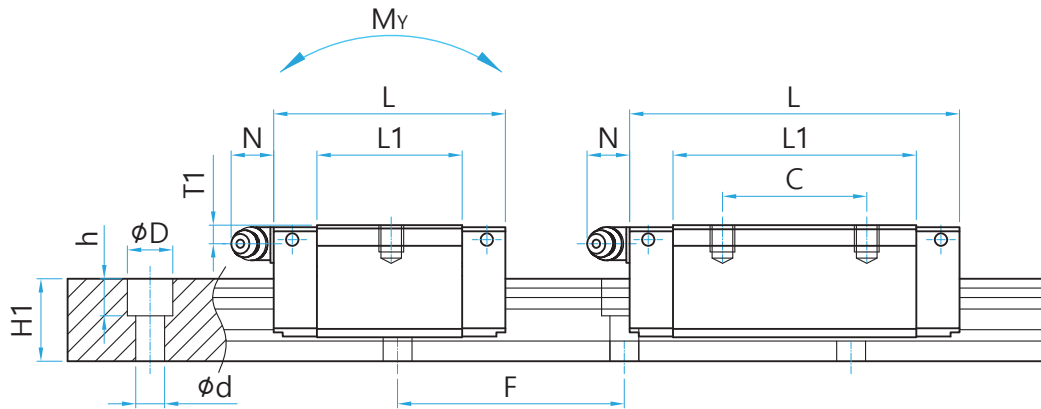

TRS-VS

TRS-VN

(unit : mm)

형번	W1	H1	ødxøDxh	F	Ca (kgf)	Coa (kgf)	Mx (kgf/m)	My (kgf/m)	Mz (kgf/m)	블럭 (kg)	레일 (kg/m)
TRS15VS	15	13	4.5 x 7.5 x 6	60	908	1471	10	6	6	0.09	1.3
TRS15VN					1206	2206	16	14	14	0.15	
TRS20VS	20	16.5	6 x 9.5 x 8.5	60	1398	2140	21	10	10	0.15	2.3
TRS20VN					1896	3307	33	26	26	0.23	
TRS25VS	23	20	7 x 11 x 9	60	1943	3002	34	18	18	0.25	3.2
TRS25VN					2581	4503	52	43	43	0.39	
TRS30VS	28	23	9 x 14 x 12	80	2697	3962	55	26	26	0.48	4.5
TRS30VN					3807	6483	90	74	74	0.77	
TRS35VS	34	26	9 x 14 x 12	80	3753	5401	92	42	42	0.71	6.3
TRS35VN					5090	8346	142	106	106	1.15	
TRS45VN	45	32	14 x 20 x 17	105	6758	10887	248	158	158	1.98	10.4

Ca : 동정격하중, Coa : 정정격하중, Mx, My, Mz: 모멘트하중